


Ringmuttern

Závesná matica

DIN 582. Рым-гайка

DIN
582

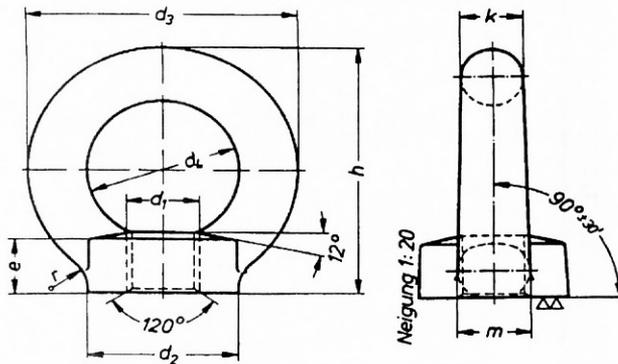


	C 15	
MATERIAL		
OBERFLÄCHE		
blank		verz

max. Belastbarkeit für 1 Mutter (F1)

Zugrichtung senkrecht,

und max. Belastbarkeit für 2 Muttern (F2)

Zugrichtung 45° (in kg).

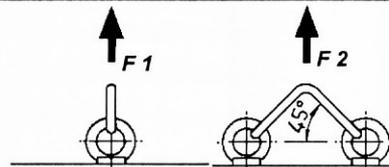

d 1	d 2	d 3	d 4	e	h	F 1	F 2	blank	verzinkt
M 6	20	36	20	-	36	70	50	LG	LG
M 8	20	36	20	6	36	140	95	LG	LG
M 10	25	45	25	8	45	230	170	LG	LG
M 12	30	54	30	10	53	340	240	LG	LG
M 14	35	63	35	-	62	490	340	LG	LG
M 16	35	63	35	12	62	700	500	LG	LG
M 18	-	-	-	-	-	-	-	LG	
M 20	40	72	40	14	71	1200	830	LG	LG
M 22	50	90	50	-	90	1500	1050	LG	
M 24	50	90	50	18	90	1800	1270	LG	LG
M 27	65	108	60	-	109	2500	1650	LG	LG
M 30	65	108	60	22	109	3600	2600	LG	LG
M 36	75	126	70	26	128	5100	3700	LG	LG
M 42	85	144	80	30	147	7000	5000	LG	LG
M 48	100	166	90	35	168	8600	6100	LG	LG
M 56	110	184	100	38	187	11500	8300		LG